


Quik-Therm Multi-Purpose & Sub-Grade Insulation (MPI) & (SGI)

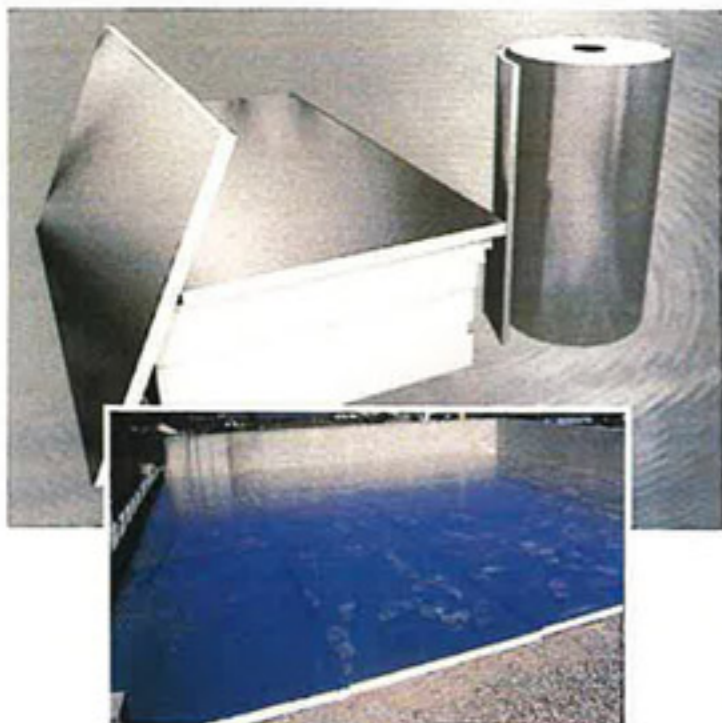

Thickness

1/2"
11/16"
1"
2", 3" & thicker

Dimensions

Rolls - 4' x 72'
Rolls - 4' x 48'
Sheets - 4' x 8'
Sheets - 4' x 8'

Applications

- Below Grade Applications
- Interior Walls & Ceilings
- Exterior Walls & Roofs
- Concrete & Steel Buildings

Features & Benefits

- Air, vapour, radon and radiant barrier - ALL IN ONE
- Does not absorb moisture
- NO poly required
- Flexible & durable
- Fast and easy to install
- Superior R-Value performance - SAVES ENERGY DOLLARS
- Contains recycled material



Innovative Insulation Solutions

Manufactured in Canada

1.888.735.3012

quiktherm.com




Tested by Canadian Accredited Laboratories

Supported by Building Scientists

Your Local Quik-Therm Distributor:

H.B.T. Enterprises Ltd.
769 Ominica St. W.
Moose Jaw, SK S6H 4N9
Ph: (306) 694-4328


CIS
Connect
Solar Dry
MPI & SGI

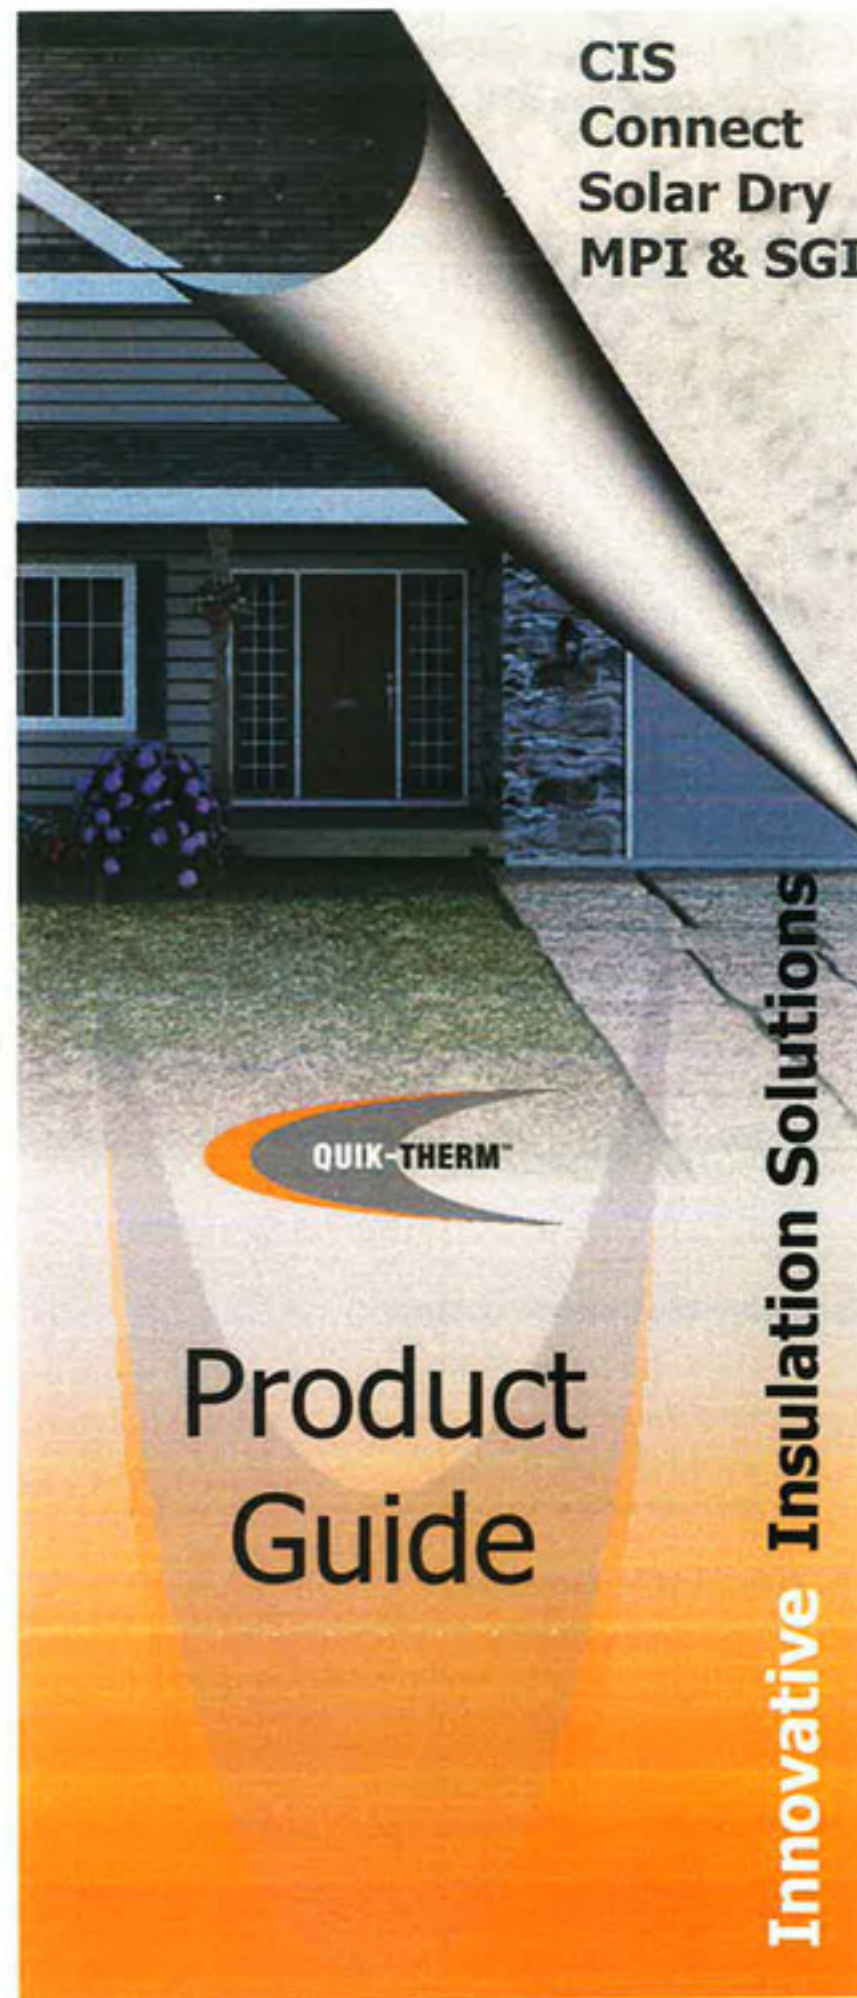

Product
Guide

Innovative Insulation Solutions

Quik-Therm Interior Basement & Concrete Insulation System (CIS)

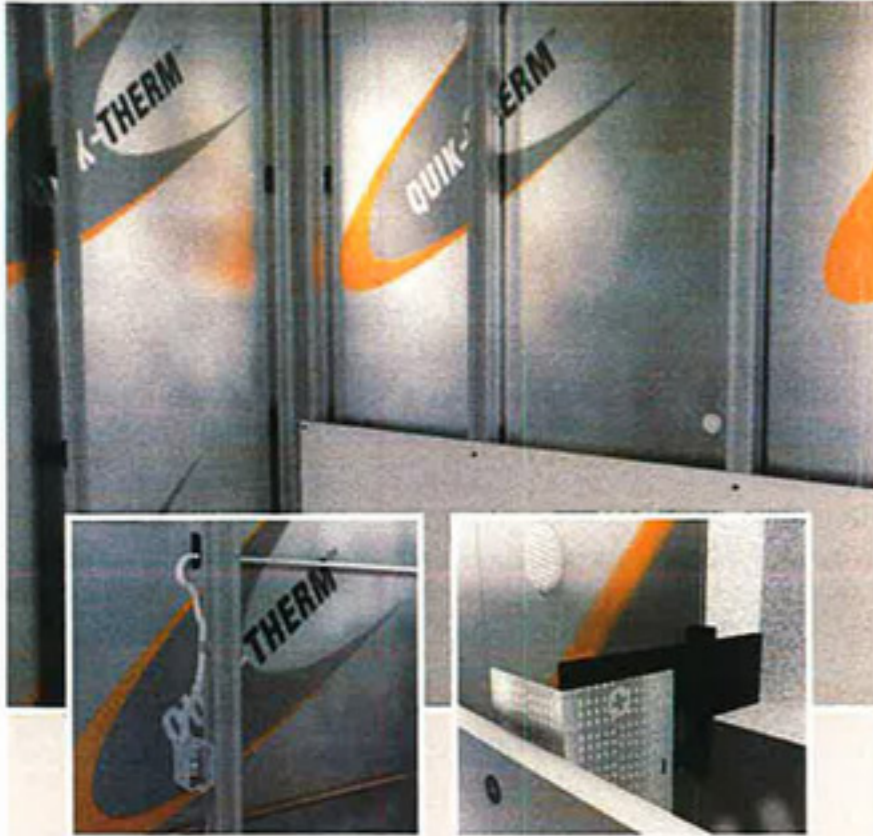

Thickness

2" to 4"

Dimensions

Studs: 24" O.C.
Panels: 8' & 10' heights


Interior Wall Applications

- Residential Concrete Basements
- Commercial Concrete Buildings
- Block Buildings
- Heritage Buildings

Features & Benefits

- FLOOD RESISTANT
- Outperforms conventional concrete insulation methods
- All in one assembly
- Plumbs & levels uneven walls
- Installs in 1/2 the time of Batt, Poly, and Studs
- SAVES ENERGY DOLLARS
- NO MOLD, NO formaldehyde, NO Odours
- LIFETIME TRANSFERRABLE WARRANTY

Quik-Therm Solar Dry Insulation Breathable Exterior Wall Assembly (SDI)

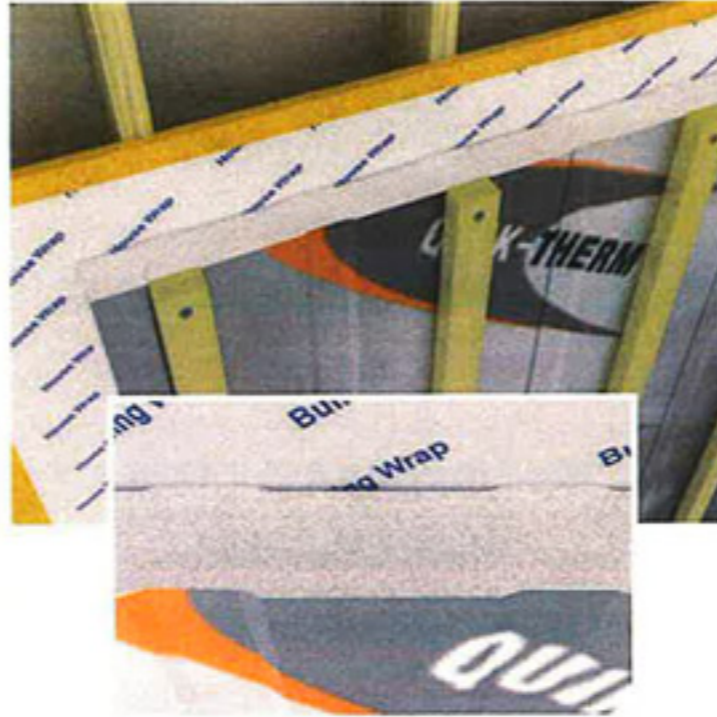

Thickness

1 1/2"
2"

High density Type 2
EPS Core

Dimensions

Sheets: 4' x 8'
Pre-measured furring strip
locations 8", 16" or 24" O.C.

Applications

- Exterior Wood Framed Walls
- Concrete & Steel Buildings
- Post Frame & Modular Buildings

Features & Benefits

- Drains, dries and disperses moisture
- NO double vapour barrier
- Easy rain screen integration
- NO thermal bridging
- Maintains R-Value - does NOT absorb moisture. NO wind washing effect.

Quik-Therm Connect Rigid Insulation With Built-In Strapping (Connect)



Thickness

2"
3"

Custom thicknesses
available

Dimensions

Sheets: 4' x 8'
Batten Spacing: 16" or 24" O.C.
Plywood Battens: 3/4" x 2.5" wide

Applications

- Exterior Walls
- Ceilings & Roofs
- Concrete & Steel Buildings
- Post Frame & Modular Buildings

Features & Benefits

- Strapping & insulation combined - INSTALLS FAST
- Attaches directly to sheathing or framing
- Supports heavy claddings
- Meets air barrier requirements
- SAVES material and labour costs
- Doubles R-value of most walls
- Maintains R-Value - does NOT absorb moisture. NO wind washing effect.